


Installation Diagram Gen 8 Digital Heater MINI

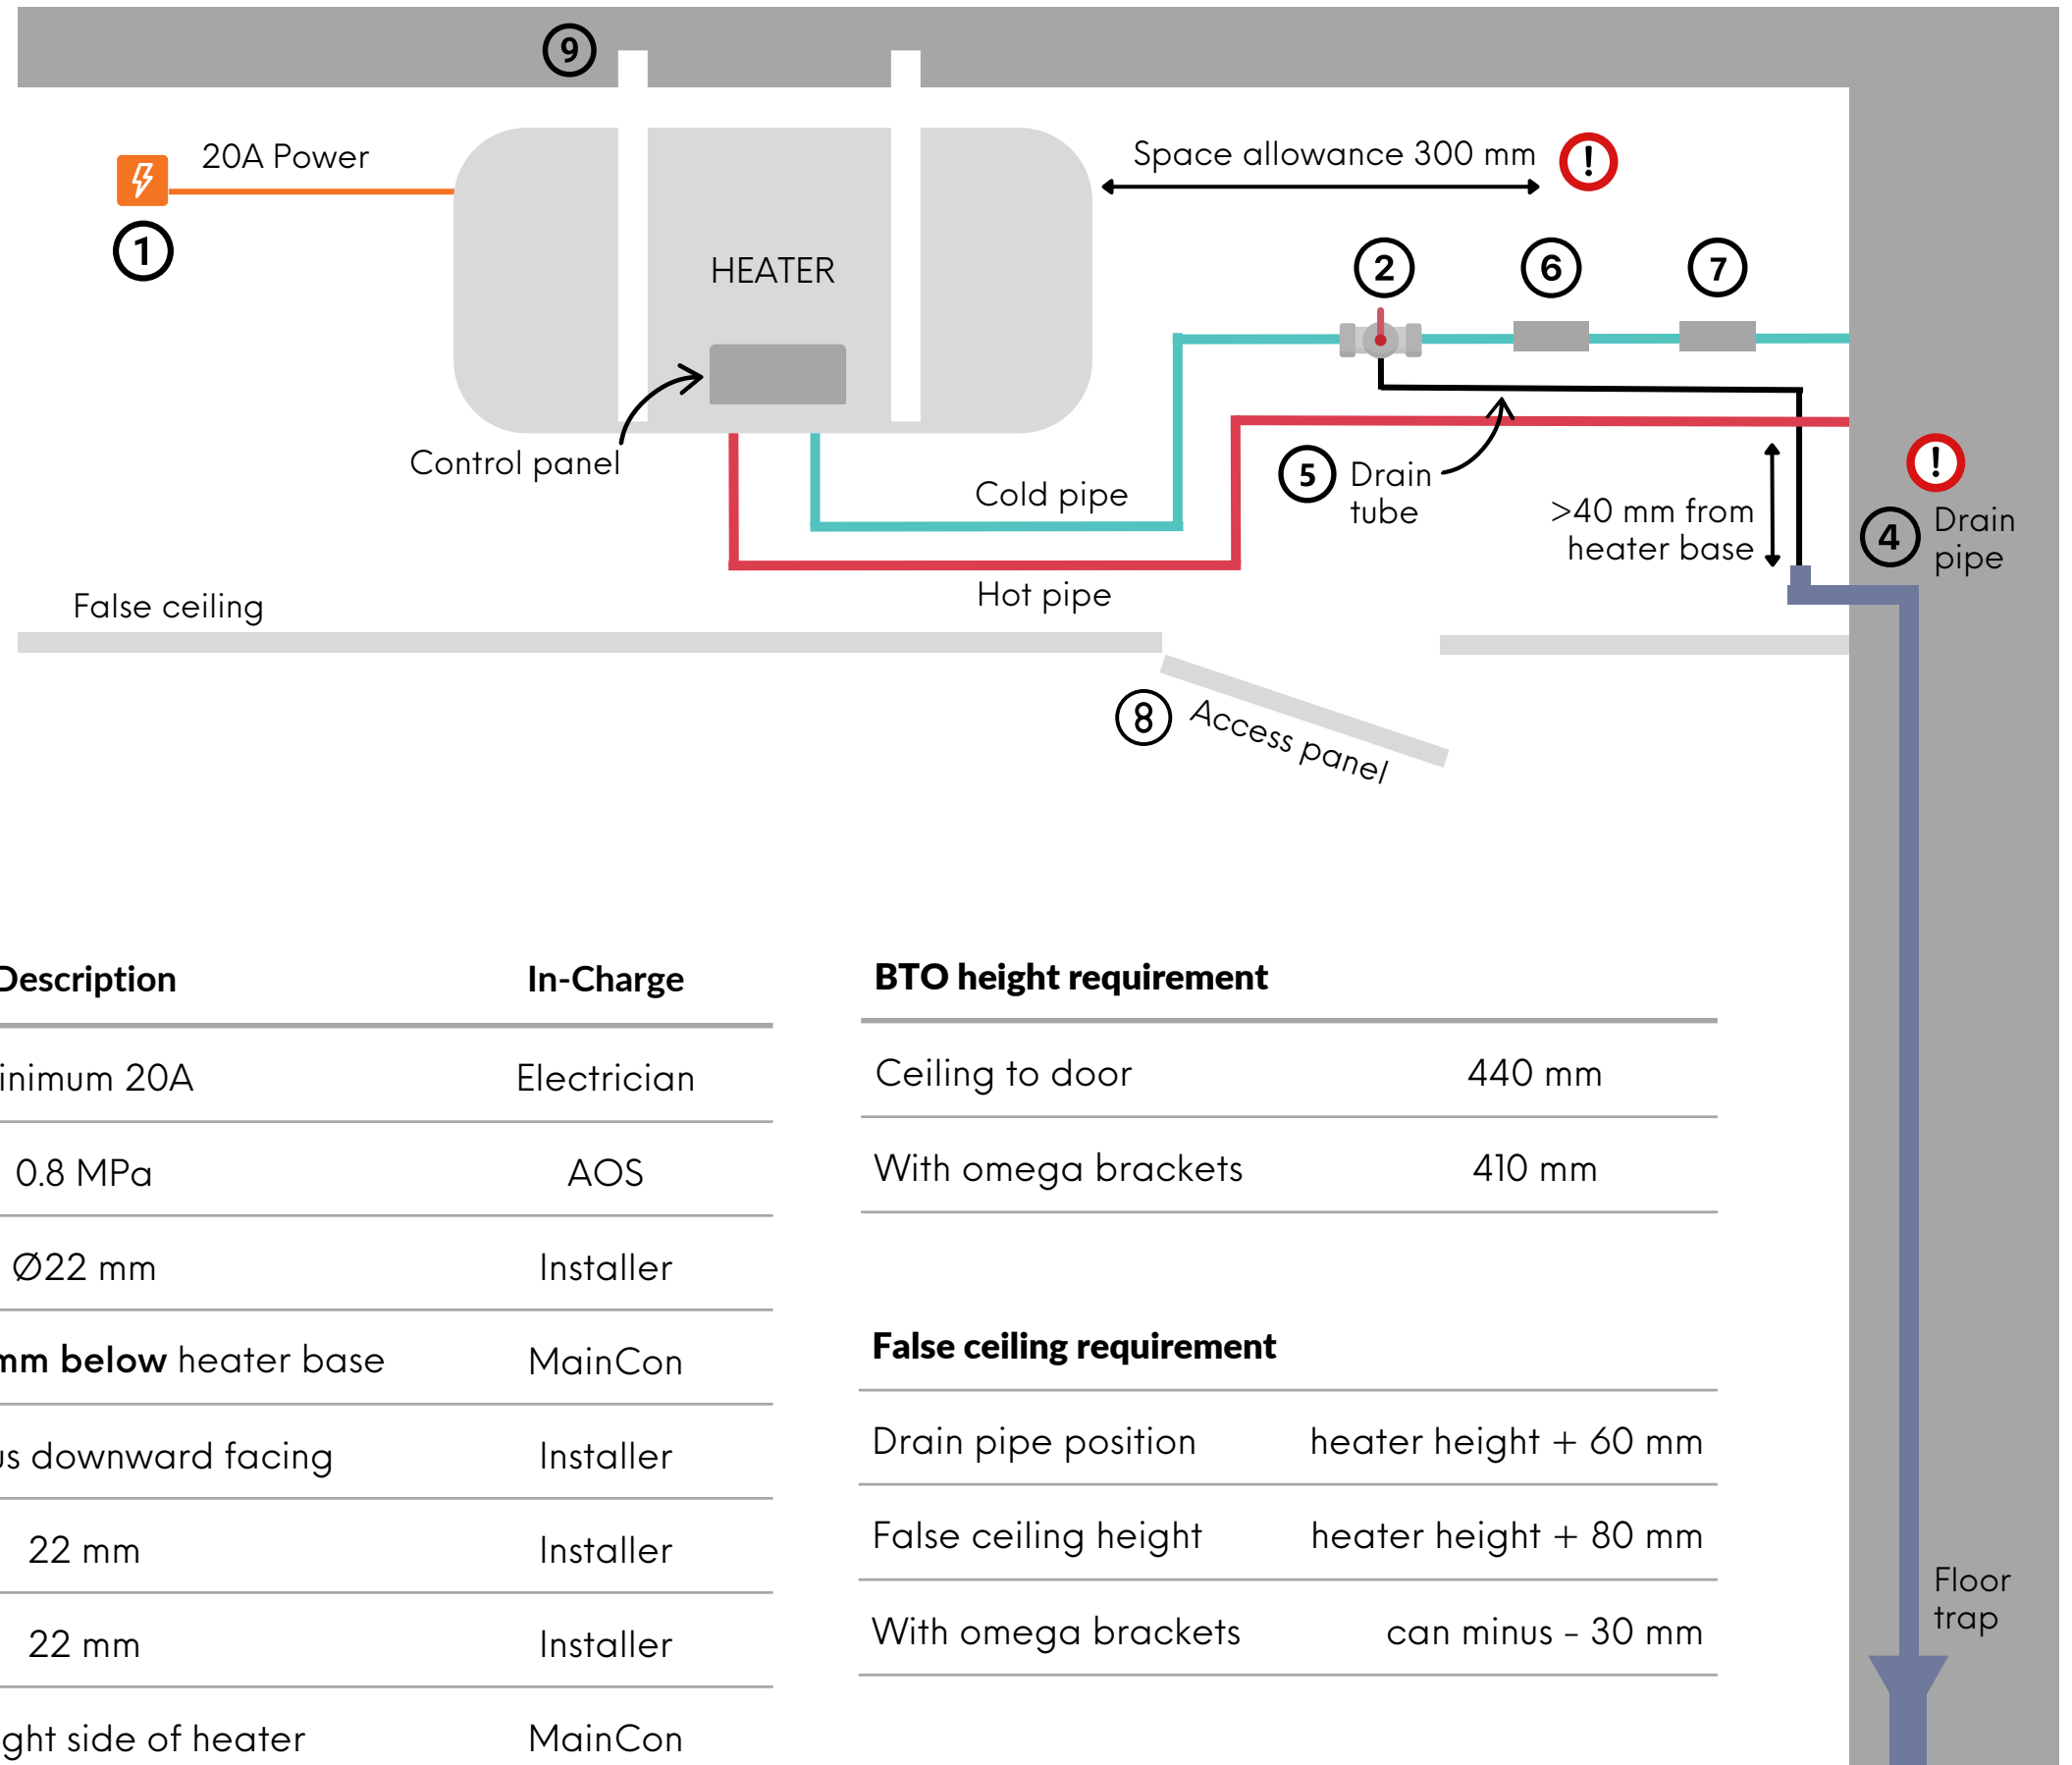

#	Item	Description	In-Charge
1	Power source	Minimum 20A	Electrician
2	Relief valve	0.8 MPa	AOS
3	Hot/cold pipe	Ø22 mm	Installer
⚠ 4	Drain pipe	at least 40 mm below heater base	MainCon
5	Drain tube	Continuous downward facing	Installer
6	Double check valve	22 mm	Installer
7	Stop valve	22 mm	Installer
8	Access panel	Below right side of heater	MainCon
9	Omega bracket	If ceiling-mounted (optional)	Installer

BTO height requirement

Ceiling to door	440 mm
With omega brackets	410 mm

False ceiling requirement

Drain pipe position	heater height + 60 mm
False ceiling height	heater height + 80 mm
With omega brackets	can minus - 30 mm

Floor trap

SPECS	GEN 8
Power (kW)	4.0
Voltage/frequency (V/Hz)	220 / 50
Temperature range (°C)	35 – 75 ± 5
Rated water pressure (MPa)	0.8
Waterproof grade	IPX4

SIZE	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
40 lit	880	340	350	21

