


Installation Diagram

Gen 6, False Ceiling

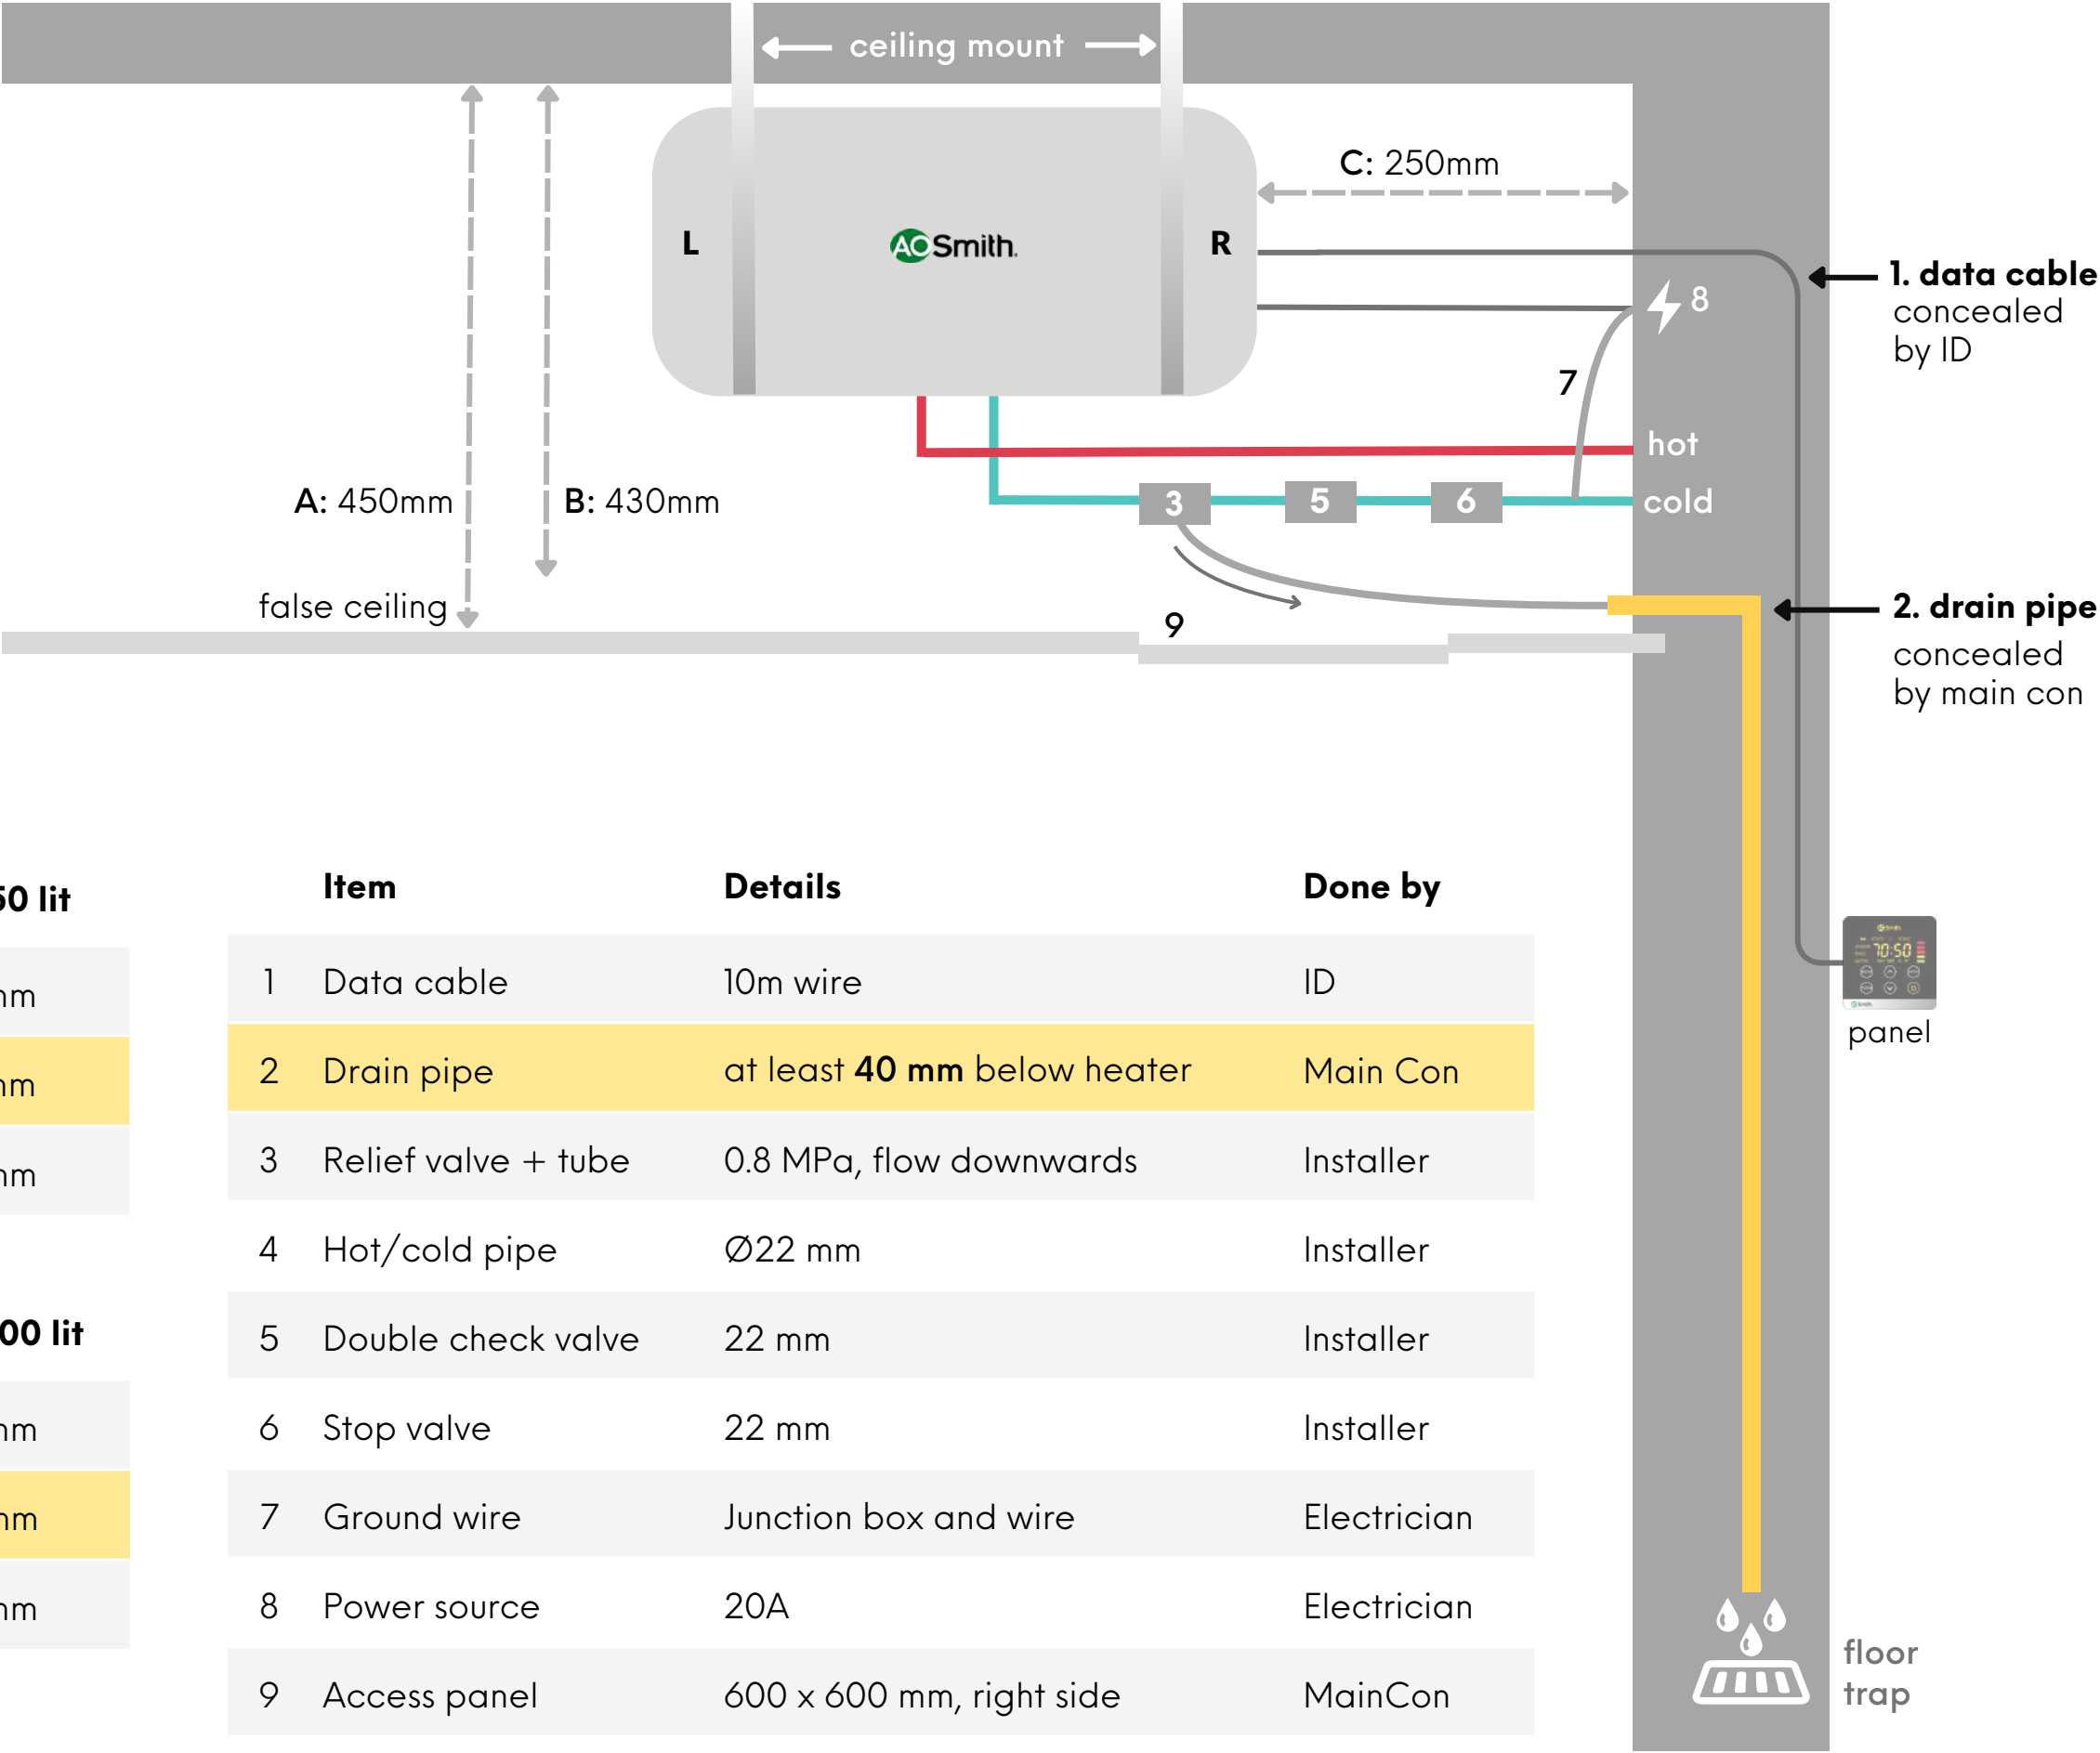

Space for ceiling mount		40 - 50 lit
A	False ceiling height	450 mm
B	Ceiling to drain pipe	430 mm
C	Service space, right side	250 mm

		80 - 100 lit
A	False ceiling height	520 mm
B	Ceiling to drain pipe	500 mm
C	Service space, right side	250 mm

	Item	Details	Done by
1	Data cable	10m wire	ID
2	Drain pipe	at least 40 mm below heater	Main Con
3	Relief valve + tube	0.8 MPa, flow downwards	Installer
4	Hot/cold pipe	Ø22 mm	Installer
5	Double check valve	22 mm	Installer
6	Stop valve	22 mm	Installer
7	Ground wire	Junction box and wire	Electrician
8	Power source	20A	Electrician
9	Access panel	600 x 600 mm, right side	MainCon

Specs	Gen 6
Power (kW)	3.0
Voltage/frequency (V/Hz)	220~230 / 50
Temperature range (°C)	35 – 75 ± 5
Rated water pressure (MPa)	0.8
Waterproof grade	IPX4

Size	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
40 lit	718	395	395	21
50 lit	838	395	395	23
80 lit	863	463	463	30
100 lit	1028	463	463	33

